


Octagonal CUPOLA  
screened with louvers  
and light fixture

MODULAR GAZEBO KIT  
SERIES GARDENHOUSE 15'  
with DOUBLE-TIERED Roof

Lumber:  
Western Red CEDAR #1 (Cabinet)  
Shingles:  
5X / 16" long / 1/2" thick  
or 16 oz. copper

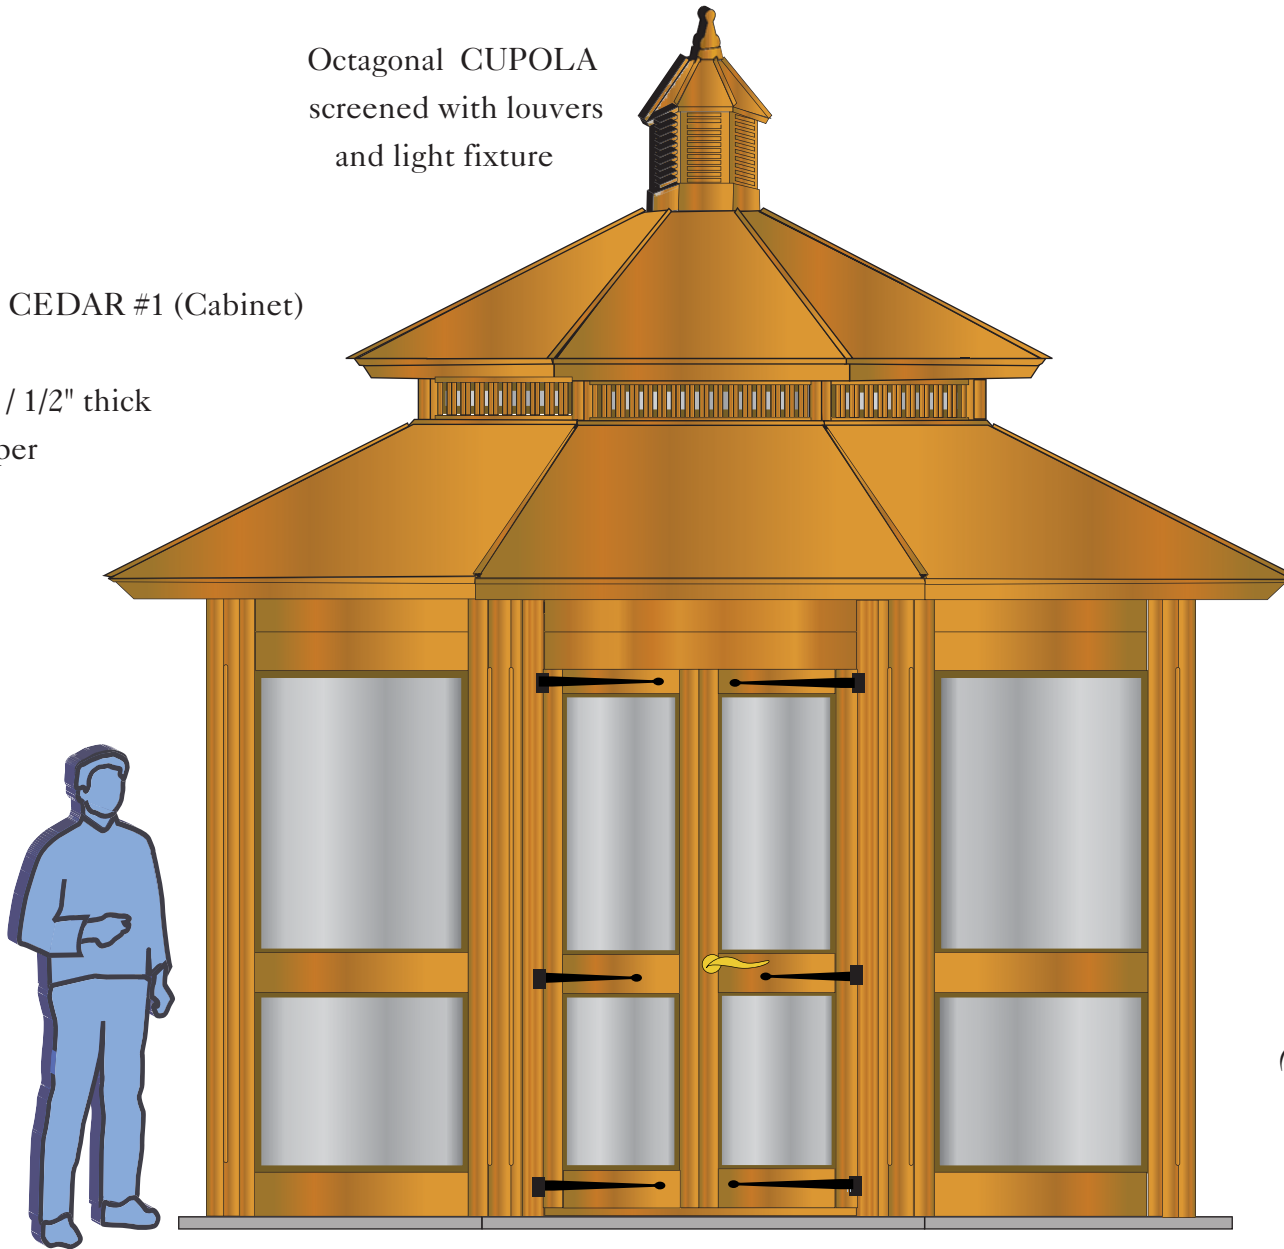

Removable Screens  
Interchangeable &  
Enclosure Inserts

Entry Key Lock Set  
*(bright brass or dark bronze)*

Without Cedar Floor



**VIXEN HILL CEDAR  
PRODUCTS**


P.O.Box 389 - Elverson, PA 19520  
800-423-2766

Created by: Andrea Beringer

Date: Jan 2015

Drawing: 1 of 9

Model: 15B

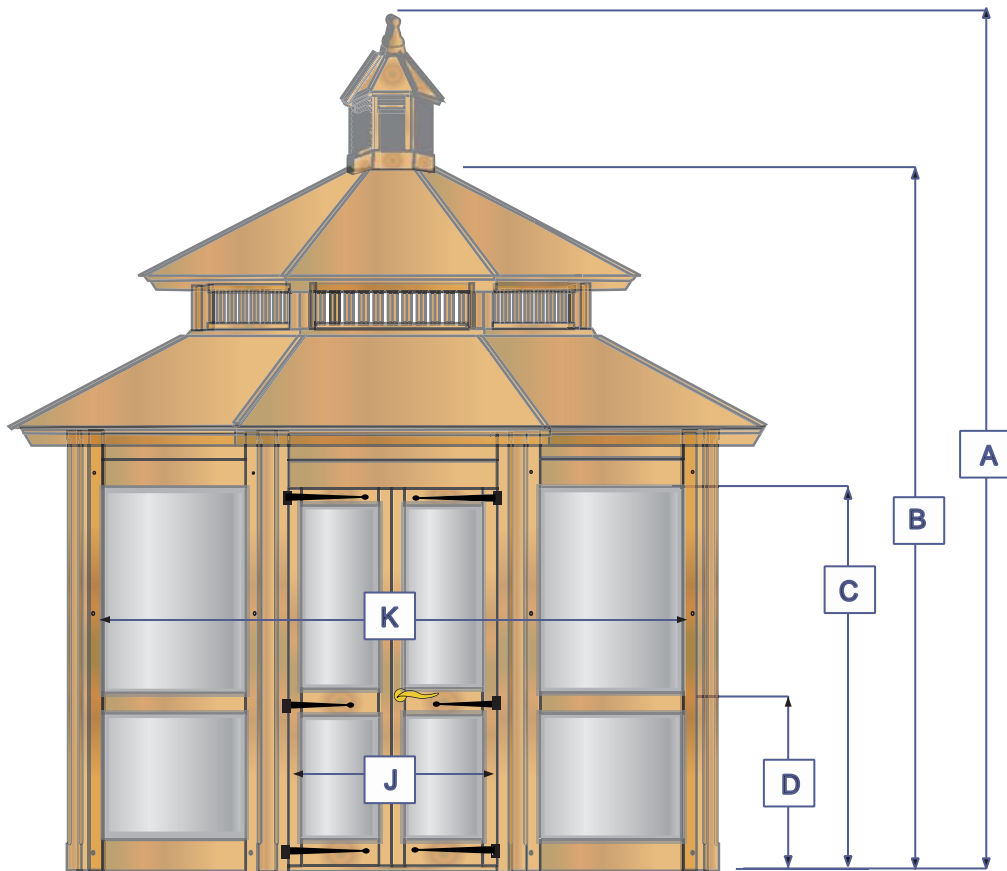

### SIZE & DIMENSIONS

<b>Key: Based on roof type</b>	<b>15B</b>
*A: Height, Overall	188"
B: Height, Grade/peak	158"
C: Height, Door Entrance	80 1/4"
D: Height, Top of Cross-Rail	34"
J: Width, Door Entrance	52"
K: Width, Interior Min.	154"



**VIXEN HILL CEDAR  
PRODUCTS**

P.O.Box 389 - Elverson, PA 19520  
800-423-2766


Created by: Andrea Beringer

Date: Jan 2015

Drawing: 2 of 9

Model: GH-15B

WALL PANEL CONSTRUCTION




Inner Panel Cap

Outer Panel Cap

Panel Cap Spacer

PLATED ROTO LOCK CONNECTS WALL PANEL TO POST.

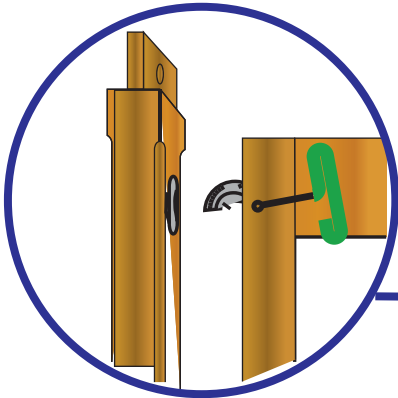

4X4 Post

Threaded-Through-Rod

(2) 2x6 ( 10 1/2" )

47 1/4"

2x6 ( 5 1/4" )

2x6 ( 5 1/4" )

91"



2x4 ( 3 1/2" )

6" Structural Screws

(2) 4" Screws  
(HOLE 3" ON LEFT & 2" ON RIGHT SIDE)

24 1/2"

2x6 ( 5 1/4" )

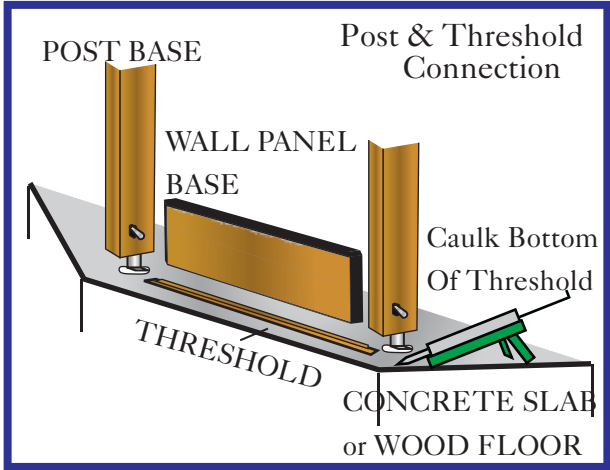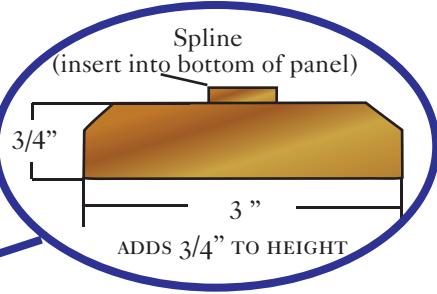

58 1/2"

THRESHOLD



**VIXEN HILL CEDAR PRODUCTS**  
P.O.Box 389 - Elverson, PA 19520  
800-423-2766


Created by: Andrea Beringer

Date: Jan 2015

Drawing: 3 of 9

Model: GH-15

# DOUBLE DOOR CONSTRUCTION

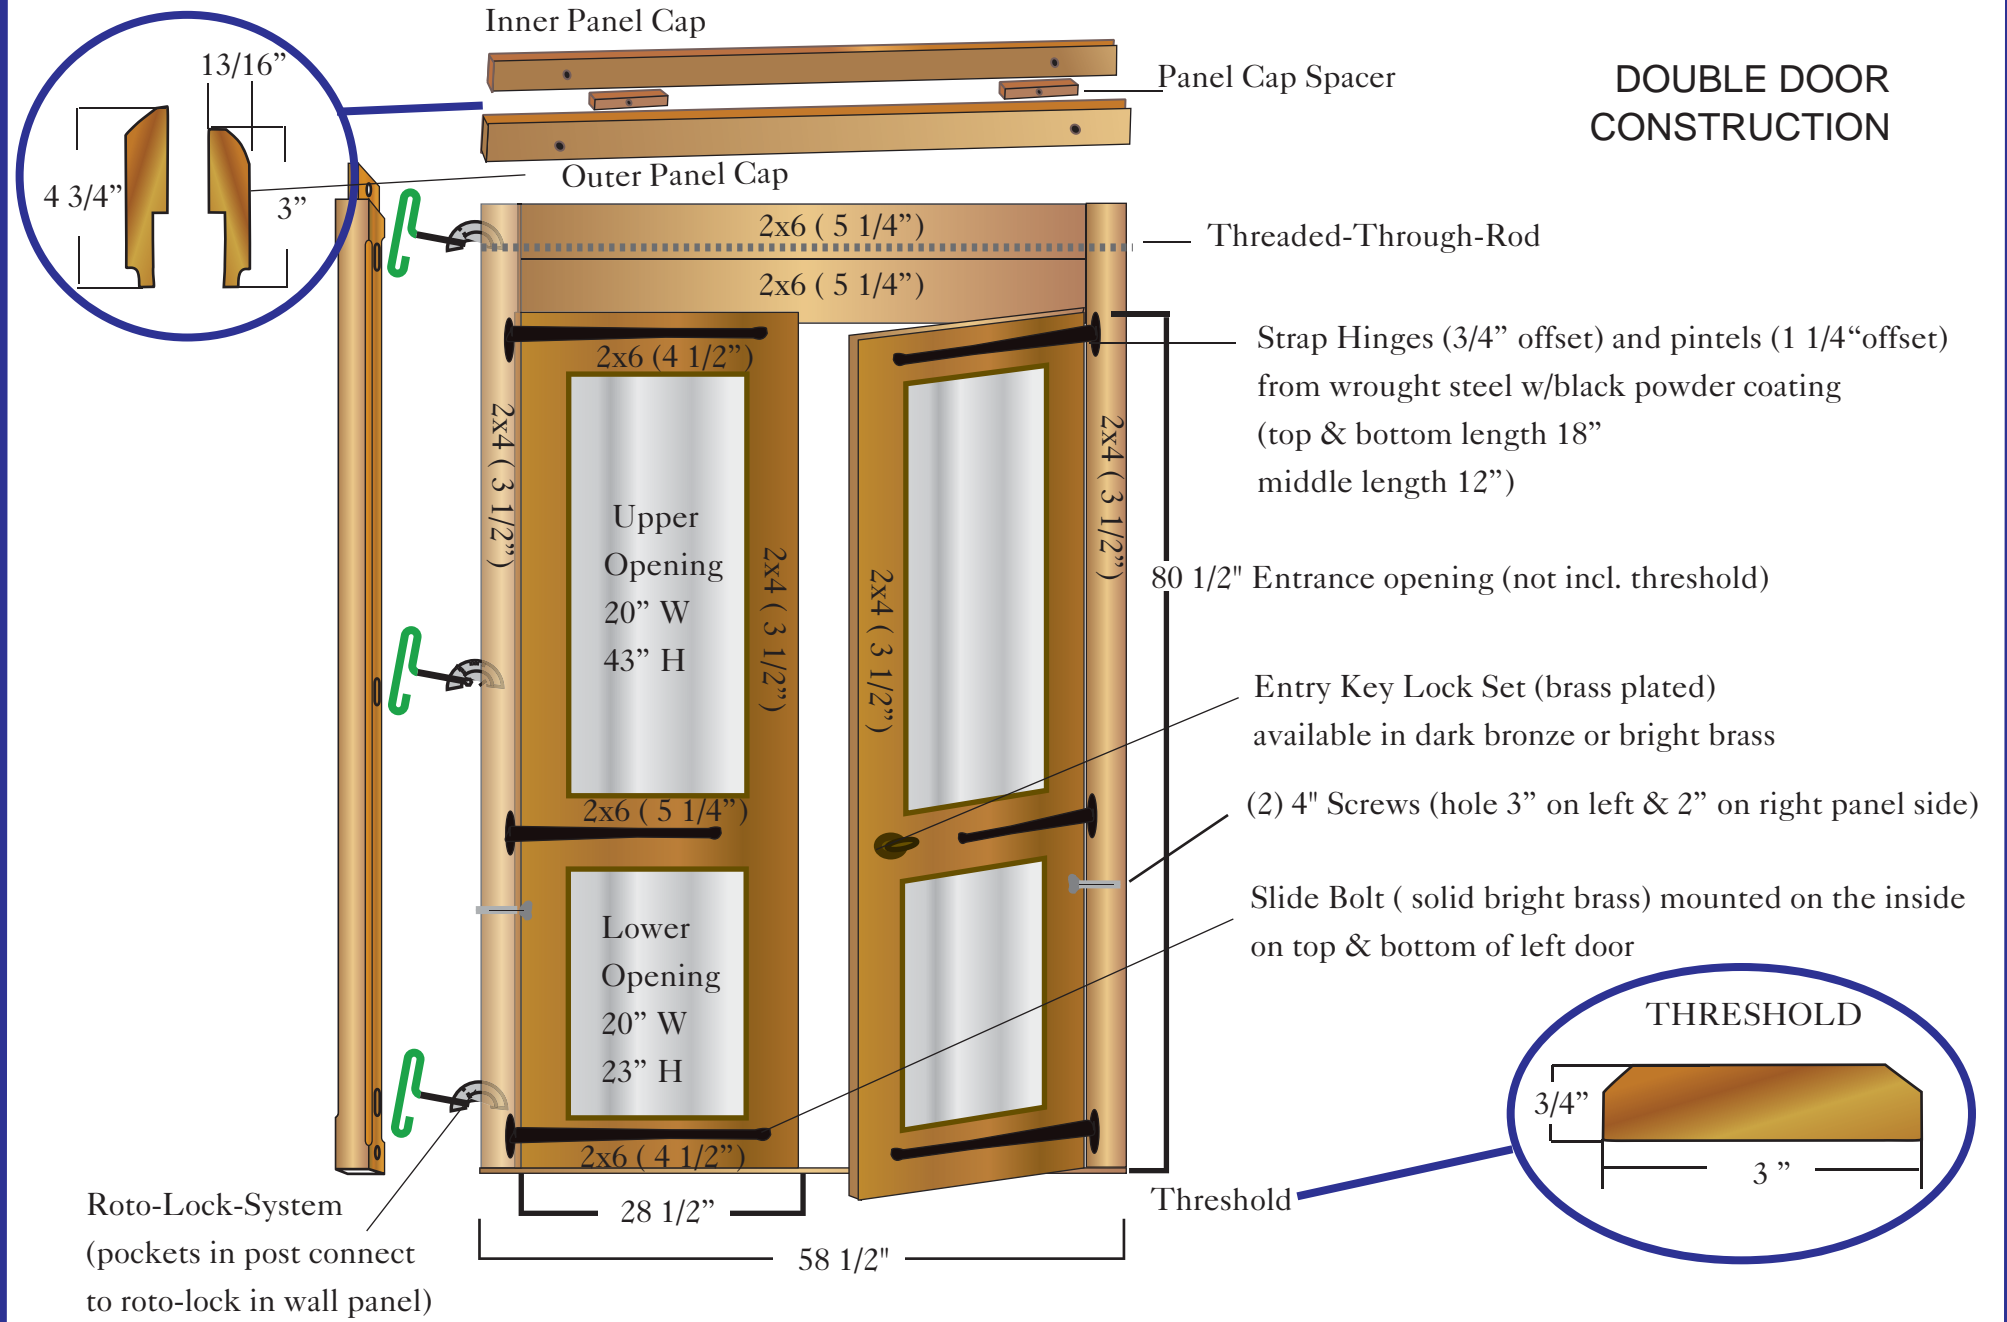

**Electrical**

**Light Fixture  
(max. 500W)**



**Grooved  
Roof Section**

**Grooved  
Riser**

**Upper Fret**

**Groove Roof  
Section**

**One Pre-Wired Electrical Post  
is standard for GH models**

**Additional Options:**

**Outlet posts (dual)**

**Fan Control post (fan/light)**

**Channel Posts (for custom wiring)**


**14-2 UF/B with ground**

**Hidden Wire  
through  
Channeled  
Post**

**Electric Outlet  
w/switch &  
receptacle (GFI)**

**Note: For concrete slab use conduit  
through void (see slab instructions)**

**Floor Board  
w/pre-drilled hole**



**VIXEN HILL CEDAR  
PRODUCTS**

**P.O.Box 389 - Elverson, PA 19520  
800-423-2766**

Created by: Andrea Beringer


Date: Jan 2015

Drawing: 5 of 9

Model: GH


ROOF

CONSTRUCTION

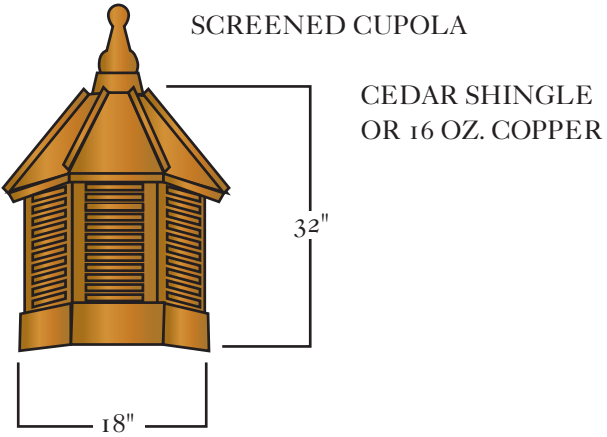



THE CUPOLA IS CONNECTED WITH STAINLESS STEEL SCREW FROM THE UNDER SIDE OF THE ROOF LATH.

UPPER FRET

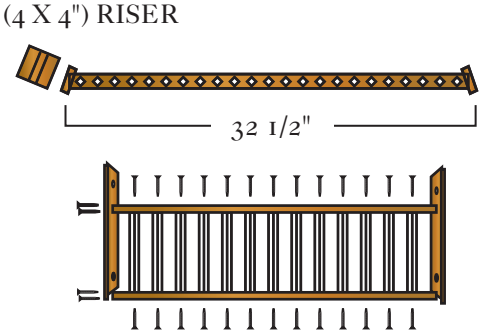

(5/4 X 5/4") SPINDLE (2 X 3") RAIL  
(5/4 X 4") FRET FRAME  
#10 X 2" SCREWS

NOMINAL SIZES

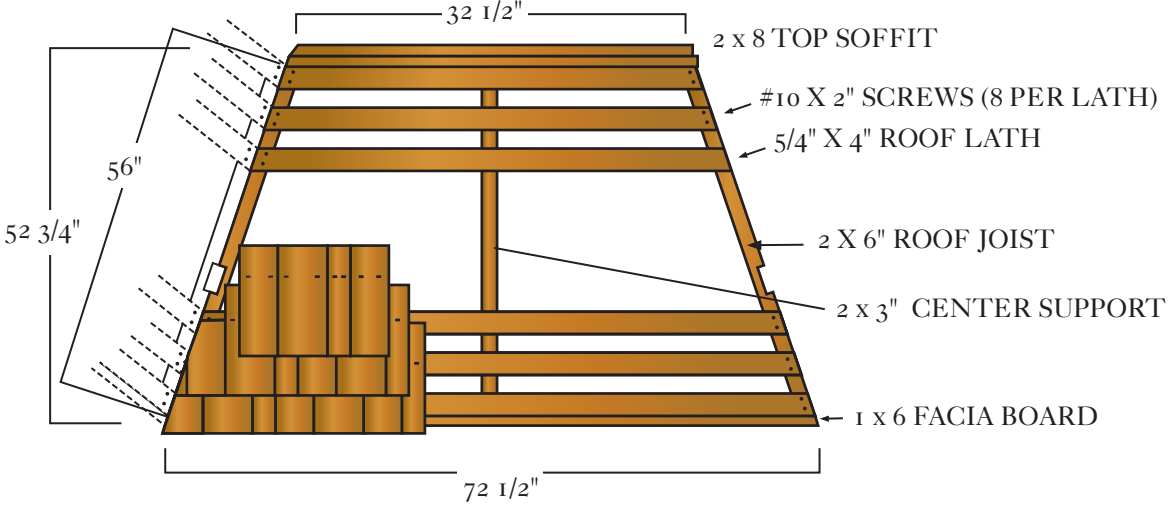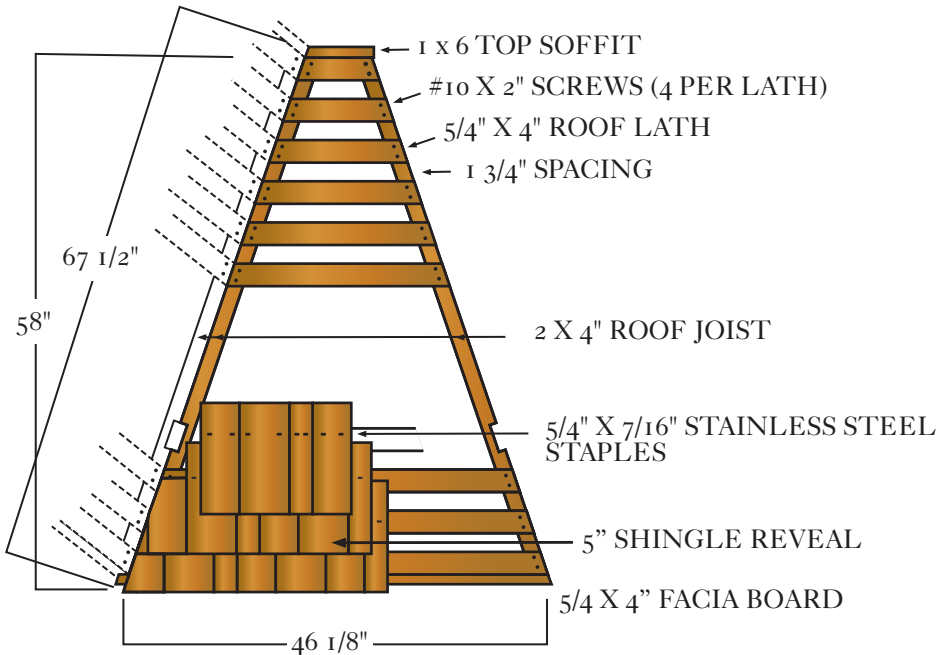

**VIXEN HILL CEDAR PRODUCTS**

P.O.Box 389 - Elverson, PA 19520  
800-423-2766


Created by: Andrea Beringer

Date: Jan 2015

Drawing: 6 of 9

Model: 15B


# ROOF ATTACHMENT

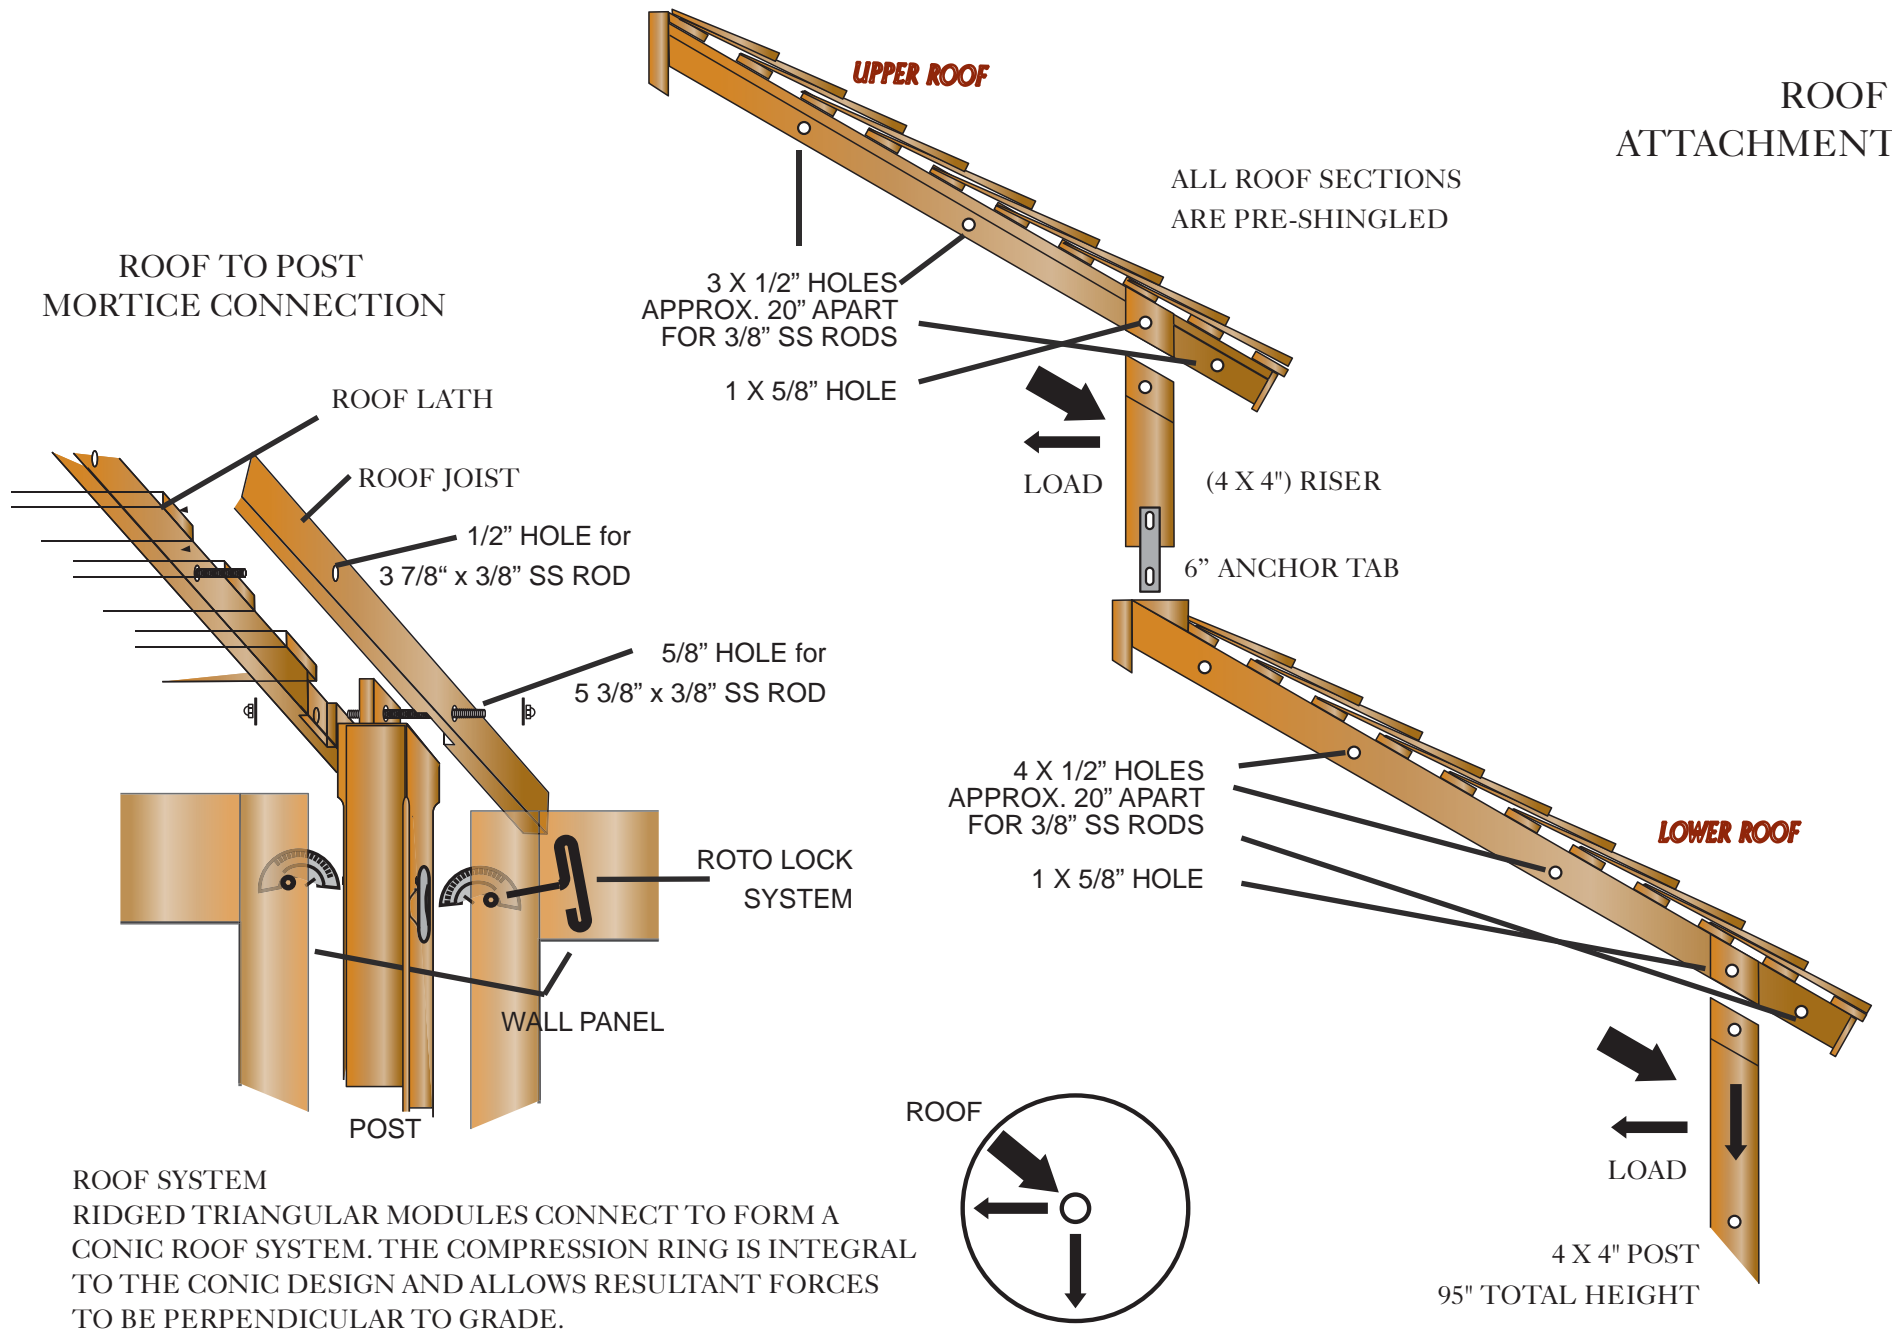

# CONCRETE SLAB Dimensions for UNITS WITHOUT VIXEN HILL FLOOR SYSTEM

## ANCHORING HARDWARE DIMENSIONS



3" ANCHOR PIN



6" LONG  
( 3 1/2" INTO  
HYDROLYTIC GROUT  
2 1/2" INSIDE POST )

6" SS ANGLED ANCHOR  
1/8" THICK, 1 1/2" WIDE, WITH 1/2" BEND

## POST ANCHORING ON CONCRETE SLAB

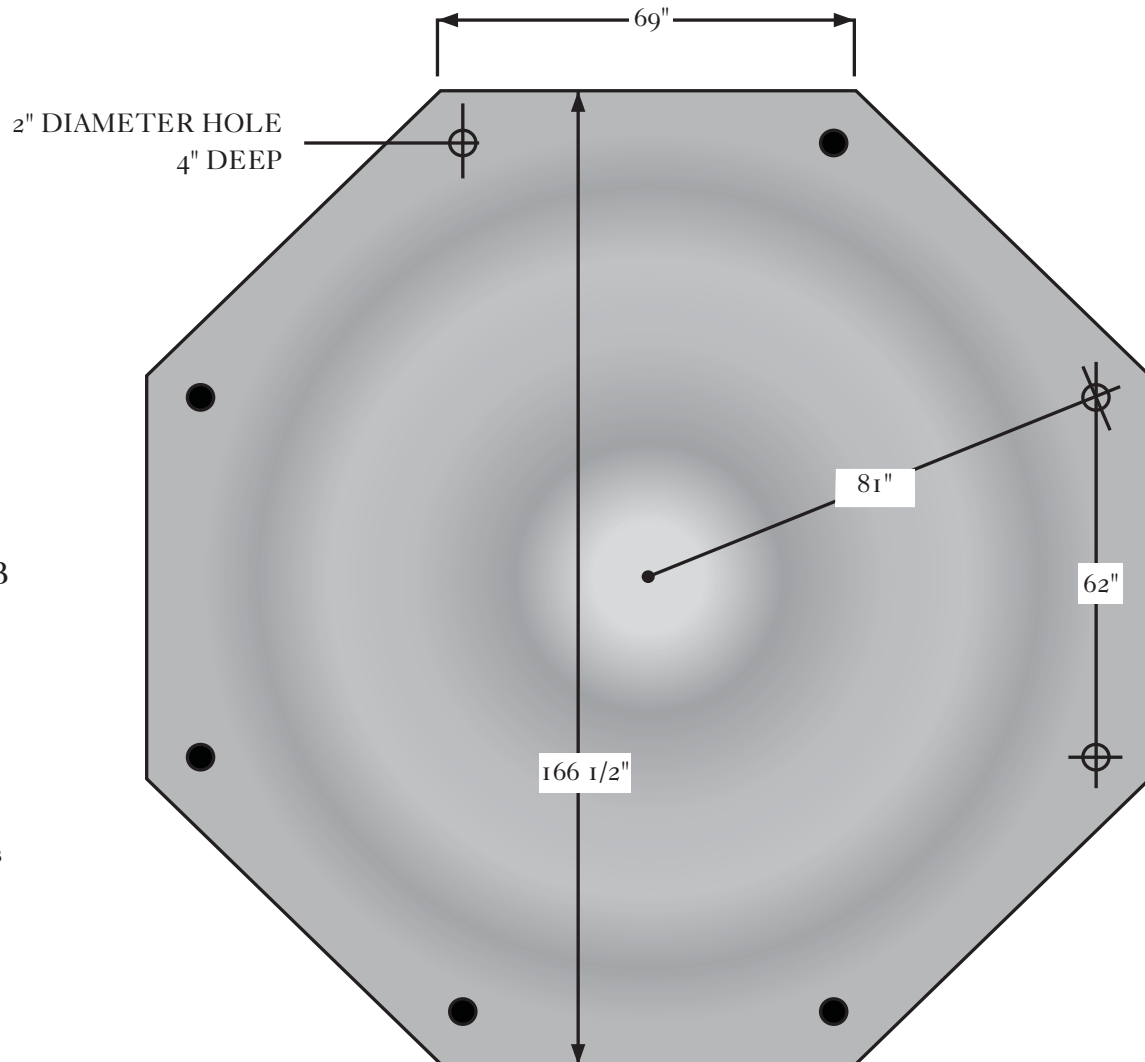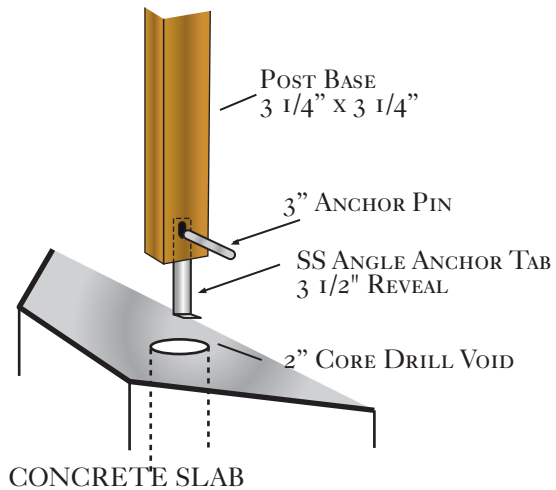

**VIXEN HILL CEDAR  
PRODUCTS**

P.O. Box 389 - Elverson, PA 19520  
800-423-2766

Created by: Andrea Beringer Date: Jan 2015

Drawing: 8 of 9

Model: 15'



## SPECIFICATIONS FOR THE CABINET MODELS (9', 12', 15', 8X11'X 11X15' AND 14X19', 22')

### PART 1 GENERAL

1.1 SCOPE. THE CONTRACTOR SHALL FURNISH AND INSTALL A WOODEN GAZEBO AS SHOWN ON PLANS AND HEREIN SPECIFIED AS SUPPLIED BY VIXEN HILL MFG. CO. INC., OF ELVERSON, PA 19520.

### PART 2 PRODUCT

2.1 WOOD MATERIALS. FOR CABINET GRADE SHALL BE FABRICATED FROM AIR-DRIED, #1 OLD GROWTH & ROT RESISTANT WESTERN RED CEDAR. ALL WOOD SHALL BE GRAIN SELECTED DURING IN-HOUSE MILLING FOR BEST APPLICATION AND SAFE USE.

2.2 ROOFING SYSTEM. SHINGLES SHALL BE OF OR EQUAL TO #1 PERFECTION CLEAR HEART CEDAR AND PER THE FOLLOWING SPECIFICATIONS 5X, 16" LONG, 1/2" THICK, TAPERED. ROOF LATH SHALL BE OF NO LESS THAN NET FINISHED SIZE 1X3" WITH A 5" SPACING. ROOF SECTIONS SHALL BE COMPLETELY PRE-ASSEMBLED AND PRE-CUT, AND JOINTS BETWEEN ROOF SECTIONS SHALL BE SELF-SEALING TO PRECLUDE CAPPING. CAULK IS RECOMMENDED TO BE USED AT THE ROOF JOIST.

2.3 SURFACE FINISH. ALL WOOD MEMBERS SHALL BE SURFACED FOUR SIDES. SURFACES DISPLAYING PLANER SKIPS OR SAW MARKS AFTER DRESSING SHALL BE LIMITED TO LESS THAN 25% OF SHOWN FACES. HAND CONTACT EDGES MAY BE ROUNDED, CHAMFERED, OR EDGE-SHAPED FREE OF SPLINTERS AND SMOOTH TO THE TOUCH. ALL EXPOSED SURFACES SHALL BE PREPARED FOR MAXIMUM ACCEPTANCE OF OIL-BASED FINISHES (OPTIONAL WITH ADDITIONAL COST).

2.4 HARDWARE. ALL ASSEMBLY & ANCHORING HARDWARE SHALL BE PROVIDED. CONCEALED ROTO-LOCKS ARE BUILT INTO THE WALL PANEL. THE THREADED RODS FOR THE PANEL CAPPING PIECES ARE OF GALVANIZED STEEL WITH STAINLESS STEEL CAP NUTS & WASHERS AND OF A FINISH TYPE TO CONCEAL ALL THREADS. ALL HARDWARE IN GROUND CONTACT SHALL BE OF STAINLESS STEEL FOR CABINET GRADE. NO NAILS SHALL BE REQUIRED OR PROVIDED. THE STRAP HINGES FOR THE DOOR(S) ARE MADE FROM ZINC-PLATED & POWDER-COATED STEEL WITH A FLAT AND SMOOTH FINISH.

2.5 ELECTRICAL. STANDARD FOR CABINET GRADE. THE PRE-WIRED POST PROVIDES 110V ELECTRICAL SERVICE THROUGH WIRE (14-2 UF/B WITH GROUND). THE POST HAS AN ELECTRICAL BOX WITH (GFI) RECEPTACLE AND LIGHT SWITCH. THE LIGHT FIXTURE IS SCREWED INSIDE THE CUPOLA FOR UP TO 500W STRENGTH. WIRES SHALL BE HIDDEN WITHIN THE COMPONENT PARTS THROUGH GROOVED ROOF SECTION AND CHanneled POST. ALL ELECTRICAL COMPONENTS SHALL BE UL APPROVED.

2.6 CONNECTIONS & ANCHORING. FACTORY MODULE CONSTRUCTION SHALL INCLUDE POCKET JOINTS AND STAINLESS STEEL THREADED FASTENERS. ON-SITE INTER-CONNECTION OF MODULES SHALL BE ACHIEVED USING THREADED RODS AND STAINLESS OR BRASS CAP NUTS AND WASHERS. ANCHORING SHALL BE CONCEALED AND APPROPRIATE TO THE SURFACE MOUNTING MATERIAL. ONLY SIMPLE HAND TOOLS SHALL BE REQUIRED FOR ASSEMBLY.

2.7 ENGINEERING. DESIGN OF CONNECTIONS AND MATERIALS USED SHALL BE SUCH AS TO ADHERE TO STRUCTURAL REQUIREMENTS OF MAJOR BUILDING CODES. DRAWINGS AND REPRESENTATIVE ENGINEERING SHALL BE AVAILABLE FROM THE MANUFACTURER FOR THE PURPOSE OF PERMITS OR ARCHITECTURAL REVIEW.

### PART 3 EXECUTION

3.1 PREFABRICATION. ALL COMPONENT PARTS SHALL BE PRE-ASSEMBLED TO THE FULLEST EXTENT POSSIBLE, TO PRECLUDE ANY ON-SITE DRILLING, CUTTING, FILLING, NAILING OR SANDING. ALL PREFABRICATION FASTENERS SHALL BE HIDDEN FROM VIEW OR CHanneled AND STRIPPED WITH MATCHING WOOD WHERE VISIBLE.

3.2 INSTALLATION. THE GAZEBO KIT SHALL BE SUPPLIED WITH ALL NECESSARY HARDWARE, SHOP DRAWINGS AND COMPLETE INSTRUCTIONS TO PROVIDE FOR EFFICIENT ON-SITE ASSEMBLY. AVERAGE ASSEMBLY TIME ON A PREPARED FOUNDATION SHALL NOT EXCEED 15 MAN-HOURS.



**VIXEN HILL CEDAR  
PRODUCTS**

P.O. Box 389 - Elverson, PA 19520  
800-423-2766

Created by: Andrea Beringer

Date: Jan 2015

Drawing: 9 of 9

Model: GH