Octagonal CUPOLA screened with louvers and light fixture

MODULAR GAZEBO KIT SERIES GARDENHOUSE 9' with SINGLE-TIERED Roof

Lumber:

Western Red CEDAR #1 (Cabinet)

Shingles:

5X / 16" long / 1/2" thick


or 16 oz. copper



Without Cedar Floor


Removable Screens
Interchangable &
Enclosure Inserts

Entry Key Lock Set (bright brass or dark bronze)

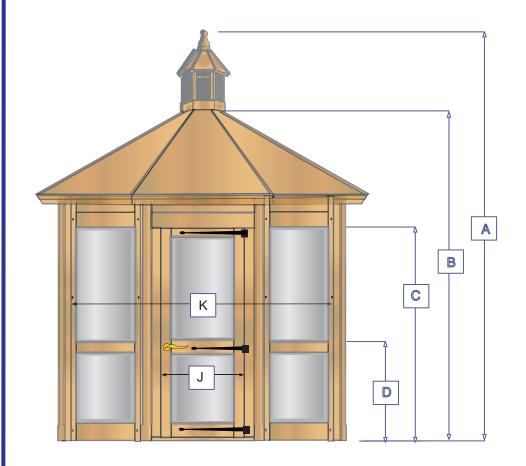

SIZE & DIMENSIONS

Key: Based on roof type	9A
*A: Height, Overall	148"
B: Height, Grade/peak	118"
C: Height, Entrance	80 1/4"
D: Height, Top of Cross Rail	34"
F: Height, grade/floor	8"
J: Width, Door	26"
K: Width, Interior Min.	86"

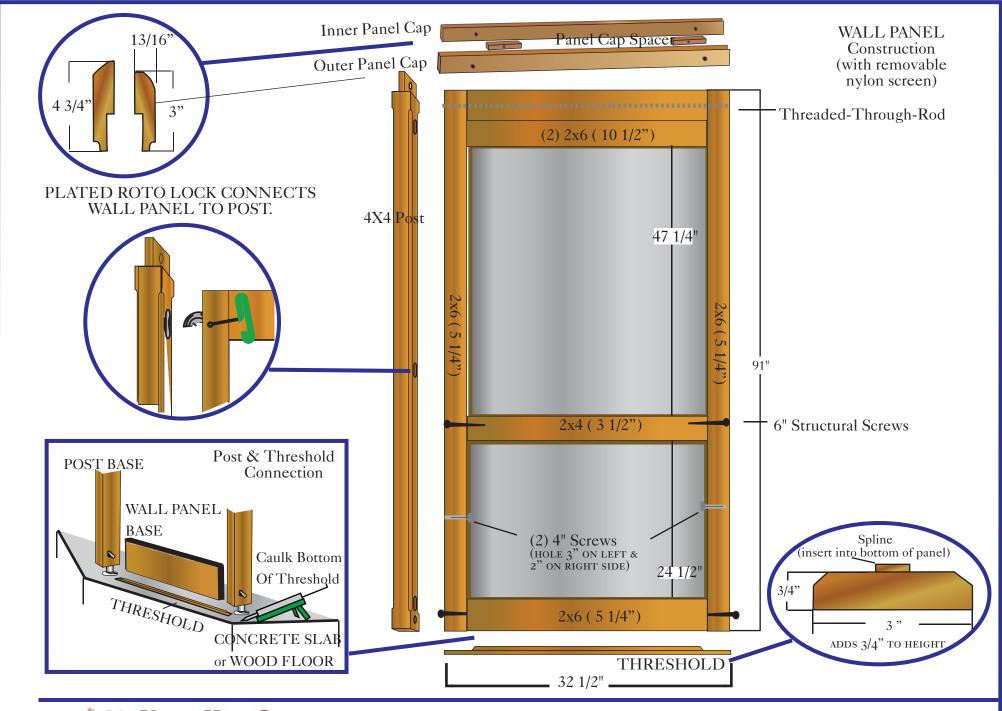




Created by: Andrea Beringer

Drawing: 3 of 9 Date: Jan 2015

Model: GH-9

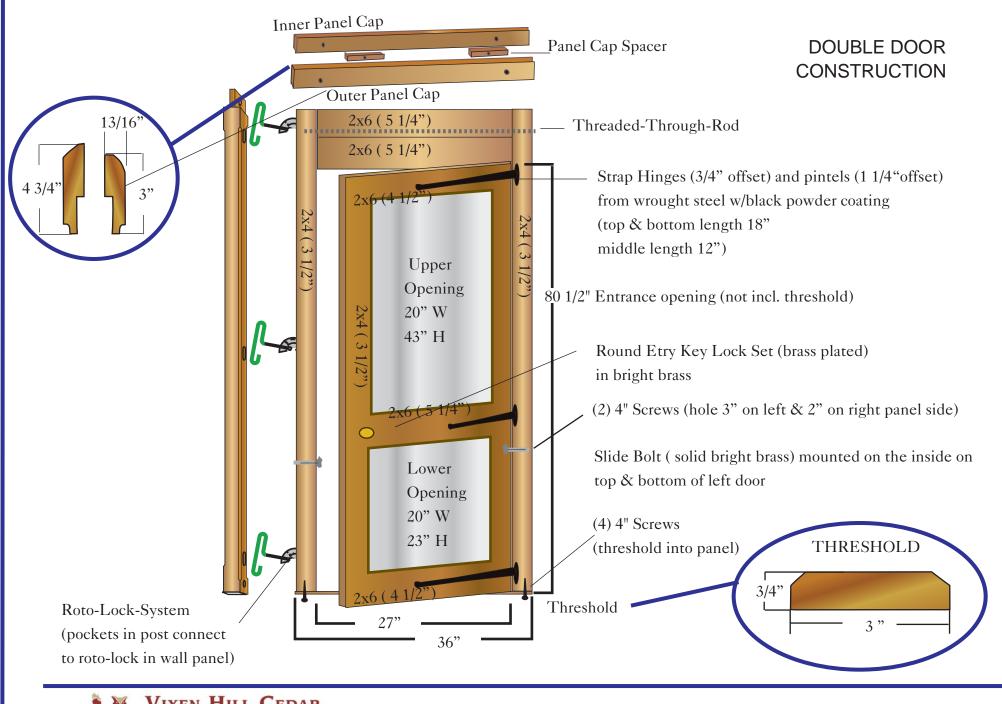


VIXEN HILL CEDAR PRODUCTS P.O.Box 389 - Elverson, PA 19520

Created by: Andrea Beringer

Date: Jan 2015

Model: GH 9'

Drawing: 4 of 9

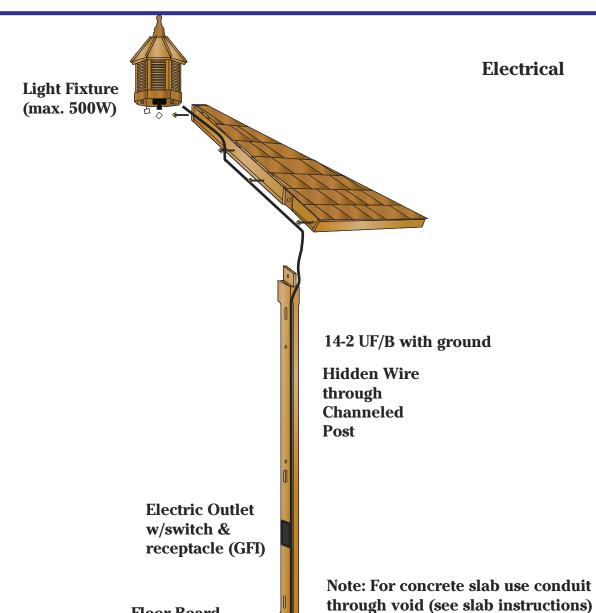

Date: Jan 2015

One Pre-Wired Electrical Post is standard for GH models

Additional Options:
Outlet posts (dual)
Fan Control post (fan/light)
Channel Posts (for custom wiring)


Floor Board w/pre-drilled hole

VIXEN HILL CEDAR PRODUCTS

P.O.Box 389 - Elverson, PA 19520 800-423-2766 Created by: Andrea Beringer

Drawing: 5 of 9


Model: GH



THE CUPOLA IS CONNECTED WITH STAINLESS STEEL SCREW FROM THE UNDER SIDE OF THE ROOF LATH.

CEDAR SHINGLE OR 16 OZ. COPPER

ROOF CONSTRUCTION

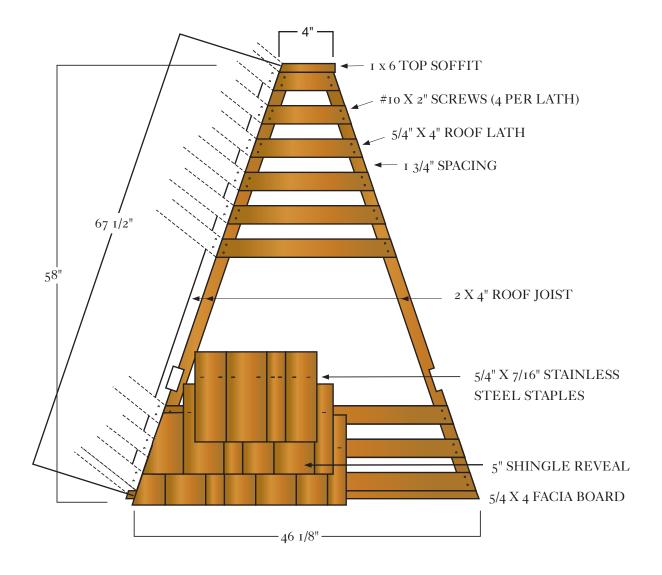

Nominal Sizes



Drawing: 6 of 9


Created by: Andrea Beringer

Date: Jan 2015

Model: 9'

ROOF ATTACHMENT

ROOF TO POST MORTICE CONNECTION

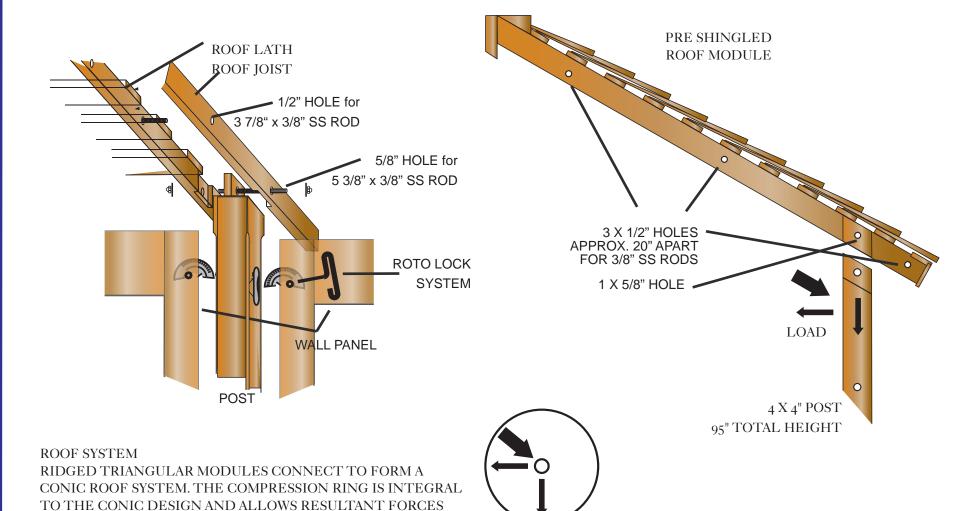




TO BE PERPENDICULAR TO GRADE.


Drawing: 7 of 9

Created by: Andrea Beringer Date


Date: Jan 2015 Model: GH-9A

POST ANCHORING & LOCATIONS FOR CONCRETE SLAB



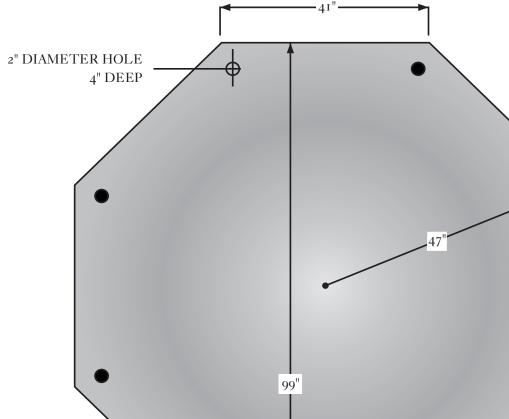

POST ANCHORING ON CONCRETE SLAB





Drawing: 8 of 9

36"

Created by: Andrea Beringer Date: Jan 2015

Model: GH-9

SPECIFICATIONS FOR THE CABINET MODELS (9', 12', 15', 8X11'X 11X15' AND 14X19', 22')

PART I GENERAL

1.1 Scope. The contractor shall furnish and install a wooden gazebo as shown on plans and herein specified as supplied by Vixen Hill Mfg. Co. Inc., of Elverson, PA 19520.

PART 2 PRODUCT

- 2.1 Wood Materials. For CABINET Grade shall be fabricated from Air-Dried, #1 old growth & rot resistant western red cedar. All wood shall be grain selected during in-house milling for best application and safe use.
- 2.2 Roofing System. Shingles shall be of or equal to #1 perfection clear heart cedar and per the following specifications 5X, 16" long, 1/2" thick, tapered. Roof lath shall be of no less than net finished size 1x3" with a 5" spacing. Roof sections shall be completely pre-assembled and pre-cut, and joints between roof sections shall be self-sealing to preclude capping. Caulk is recommended to be used at the roof joist.
- 2.3 Surface Finish. All wood members shall be surfaced four sides. Surfaces displaying planer skips or saw marks after dressing shall be limited to less than 25% of shown faces. Hand contact edges may be rounded, chamfered, or edge-shaped free of splinters and smooth to the touch. All exposed surfaces shall be prepared for maximum acceptance of oil-based finishes (optional with additional cost).
- 2.4 Hardware. All assembly & Anchoring hardware shall be provided. Concealed Roto-Locks are built into the wall panel. The threaded rods for the panel capping pieces are of galvanized steel with stainless steel cap nuts & washers and of a finish type to conceal all threads. All hardware in ground contact shall be of stainless steel for CABINET grade. No nails shall be required or provided. The strap hinges for the door(s) are mode from zinc-plated & powder-coated steel with a flat and smooth finish.
- 2.5 ELECTRICAL. STANDARD FOR CABINET GRADE. THE PRE-WIRED POST PROVIDES I 10V ELECTRICAL SERVICE THROUGH WIRE (14-2 UF/B WITH GROUND). THE POST HAS AN ELECTRICAL BOX WITH (GFI) RECEPTACLE AND LIGHT SWITCH. THE LIGHT FIXTURE IS SCREWED INSIDE THE CUPOLA FOR UP TO 500W STRENGTH. WIRES SHALL BE HIDDEN WITHIN THE COMPONENT PARTS THROUGH GROOVED ROOF SECTION AND CHANNELED POST. ALL ELECTRICAL COMPONENTS SHALL BE UL APPROVED.
- 2.6 Connections & Anchoring. Factory module construction shall include pocket joints and stainless steel threaded fasteners. On-site interconnection of modules shall be achieved using threaded rods and stainless or brass cap nuts and washers. Anchoring shall be concealed and appropriate to the surface mounting material. Only simple hand tools shall be required for assembly.
- 2.7 Engineering. Design of connections and materials used shall be such as to adhere to structural requirements of major building codes. Drawings and representative engineering shall be available from the manufacturer for the purpose of permits or architectural review.

PART 3 EXECUTION

- 3.1 Prefabrication. All component parts shall be pre-assembled to the fullest extent possible, to preclude any on-site drilling, cutting, filling, nailing or sanding. All prefabrication fasteners shall be hidden from view or channeled and stripped with matching wood where visible.
- 3.2 Installation. The gazebo kit shall be supplied with all necessary hardware, shop drawings and complete instructions to provide for efficient on-site assembly. Average assembly time on a prepared foundation shall not exceed 15 man-hours.

Created by: Andrea Beringer



Drawing: 9 of 9

Date: Jan 2015 Model: GH